


E1UHT HIGH TEMPERATURE, DOUBLE SEAL INDUSTRIAL CABLE GLAND


FOR ALL TYPES OF ARMoured CABLES

- -20°C to 200°C high temperature Thermin seals
- Metal-to-metal armour clamping
- Direct & remote installation
- Permanently crimped, low impedance earth termination
- Secure against self-loosening
- Displacement type inner seal
- Controlled outer 'load retention' seal
- Unique OSTG prevents overtightening
- Deluge protection option
- Superior EMC performance



TECHNICAL CLASSIFICATION	
DESIGN SPECIFICATION	BS 6121:Part 1:1989, IEC 62444, EN 62444
MECHANICAL CLASSIFICATION*	Impact = Level 8, Cable Anchorage = Class D
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass & Stainless Steel only
ELECTRICAL CLASSIFICATIONS*	Category B (Category A when used with braid, tape or pliable wire armour cables)
INGRESS PROTECTION RATING**	IP66 as standard (IP67, IP68*** available upon request)
CABLE TYPE	Single Wire Armour (SWA), Aluminium Wire Armour (AWA), Pliable Wire Armour (PWA), Steel Tape Armour (STA), Wire Braid Armour, Aluminium Strip Armour (ASA), Screened Flexible (EMC) Wire Braid (e.g. CY / SY), Armoured & Jacketed
SEAL MATERIAL	CMP Thermoset Rubber
SEALING TECHNIQUE	CMP Inner Displacement Seal & Unique CMP 'LRS'™ Outer Load Retention Seal
SEALING AREA(S)	Cable Inner Bedding & Outer Cable Sheath
CABLE GLAND MATERIAL	Brass, Electroless Nickel Plated Brass, Aluminium
ARMOUR CLAMPING	Reversible Armour Cone & AnyWay Universal Clamping Ring
CONTINUOUS OPERATING TEMPERATURE	-20 °C to +200 °C

* Mechanical & Electrical Classifications applied as per IEC 62444 & EN 62444. ** When CMP installation accessories are used. Refer to www.cmp-products.com for further information. *** IP68 tested to a minimum depth of 30 metres for 12 hours, alternate depths / durations can be provided upon request

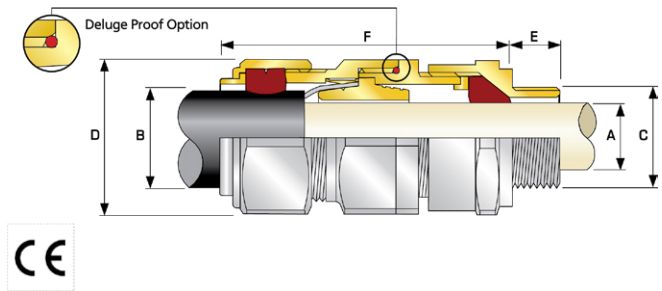

* Grooved Cone (X) is predominantly used for Wire Braid (e.g. GSWB, TCWB), Steel Tape Armour (STA, DSTA) and Aluminium Strip Armour (ASA) but is also suitable for Single Wire Armour (SWA), Aluminium Wire Armour (AWA) and Pliable Wire Armour (PWA) if the range is outside that of the Stepped Cone (W). Grooved Cone (X) dimensions shown in the Cable Gland Selection Table below are for a double wire strand of braid armour cables. Tapes can also be doubled over. For cables that have only a single layer of armour such as SWA the clamping range should be used as shown in the table below. Stepped (W) Cone is suitable for Single Wire Armour (SWA), or Aluminium Wire Armour (AWA) cables.

COMBINED ORDERING REFERENCE (*BRASS METRIC)			AVAILABLE ENTRY THREADS "C" (ALTERNATE METRIC THREAD LENGTHS AVAILABLE)					CABLE BEDDING DIAMETER "A"		OVERALL CABLE DIAMETER "B"		ARMOUR RANGE¹				ACROSS FLATS "D"		ACROSS CORNERS "D"		PROTRUSION LENGTH "F"	SHROUD	CABLE GLAND WEIGHT (KGS)
			STANDARD			OPTION																
SIZE	TYPE	ORDERING SUFFIX	METRIC	THREAD LENGTH (METRIC) "E"	NPT	THREAD LENGTH (NPT) "E"	NPT	MIN	MAX	MIN	MAX	GROOVE CONE (X)		STEPPED CONE (W)		MAX	MAX					
												MIN	MAX	MIN	MAX							
20S16	E1UHT	1RA	M20	10.0	½"	19.9	¾"	3.1	8.6	6.1	13.1	0.3	1.0	0.8	1.25	24.0	26.4	72.5	PVC04	0.163		
20S	E1UHT	1RA	M20	10.0	½"	19.9	¾"	6.1	11.6	9.5	15.9	0.3	1.0	0.8	1.25	24.0	26.4	70.0	PVC04	0.150		
20	E1UHT	1RA	M20	10.0	½"	19.9	¾"	6.5	13.9	12.5	20.9	0.4	1.0	0.8	1.25	30.5	33.6	73.0	PVC06	0.200		
25S	E1UHT	1RA	M25	10.0	¾"	20.2	1"	11.1	19.9	14.0	22.0	0.4	1.2	1.25	1.6	37.5	41.3	89.0	PVC09	0.330		
25	E1UHT	1RA	M25	10.0	¾"	20.2	1"	11.1	19.9	18.2	26.2	0.4	1.2	1.25	1.6	37.5	41.3	89.0	PVC09	0.330		
32	E1UHT	1RA	M32	10.0	1"	25.0	1 ¼"	17.0	26.2	23.7	33.9	0.4	1.2	1.6	2.0	46.0	50.6	86.0	PVC11	0.430		
40	E1UHT	1RA	M40	15.0	1 ¼"	25.6	1 ½"	22.0	32.1	27.9	40.4	0.4	1.6	1.6	2.0	55.0	60.5	90.0	PVC15	0.620		
50S	E1UHT	1RA	M50	15.0	1 ½"	26.1	2"	29.5	38.1	35.2	46.7	0.4	1.6	2.0	2.5	60.0	66.0	91.0	PVC18	0.750		
50	E1UHT	1RA	M50	15.0	2"	26.9	2 ½"	35.6	44.0	40.4	53.0	0.6	1.6	2.0	2.5	70.1	77.1	95.0	PVC21	0.950		
63S	E1UHT	1RA	M63	15.0	2"	26.9	2 ½"	40.1	49.9	45.6	59.4	0.6	1.6	2.0	2.5	75.0	82.5	102.0	PVC23	1.340		
63	E1UHT	1RA	M63	15.0	2 ½"	39.9	3"	47.2	55.9	54.6	65.8	0.6	1.6	2.0	2.5	80.0	88.0	104.0	PVC25	1.340		
75S	E1UHT	1RA	M75	15.0	2 ½"	39.9	3"	52.8	61.9	59.0	72.0	0.6	1.6	2.0	2.5	90.0	99.0	115.0	PVC28	2.110		
75	E1UHT	1RA	M75	15.0	3"	41.5	3 ½"	59.1	67.9	66.7	78.4	0.6	1.6	2.5	3.0	100.0	110.0	117.0	PVC30	2.420		
90	E1UHT	1RA	M90	24.0	3 ½"	42.8	4"	66.6	78.6	76.2	90.3	0.8	1.6	3.15	4.0	114.3	125.4	147.0	PVC32	4.210		
100	E1UHT	1RA	M100	24.0	3 ½"	42.8	4"	76.0	90.9	86.1	101.4	0.8	1.6	3.15	4.0	123.0	135.3	140.0	LSF33	4.450		
115	E1UHT	1RA	M115	24.0	4"	44.0	5"	86.0	97.9	101.5	110.2	0.8	1.6	3.15	4.0	133.4	146.7	162.0	LSF34	6.190		
130	E1UHT	1RA	M130	24.0	5"	46.8	-	97.0	114.9	110.2	123.2	0.8	1.6	3.15	4.0	152.4	160.6	174.0	LSF35	8.340		

* Note : For material options please add the following suffix to change the Ordering Reference ; Brass (no suffix required), Nickel Plated Brass "5", Copper Free Aluminium "1"
For NPT options add the following digits to the material suffix; ½" = 31; ¾" = 32; 1" = 33; 1 ¼" = 34; 1 ½" = 35; 2" = 36; 2 ½" = 37; 3" = 38; 3 ½" = 39; 4" = 310 (Brass requires prefix '0')

Examples: 32E1UHT1RA534 = Nickel Plated Brass 1 ¼" NPT, 50SE1UHT1RA035 = Brass 1 ½" NPT, 25E1UHT1RA432 = 20E1UHT1RA5 = Nickel Plated Brass M20

Dimensions are displayed in millimetres unless otherwise stated