


SS2KHT



SS2KHT DOUBLE SEAL, INTERNATIONALLY APPROVED, EXPLOSIVE ATMOSPHERE CABLE GLAND

FOR ALL TYPES OF UNARMoured & BRAIDED CABLES


- -20°C to 200°C high temperature ThermEx seals
- Provides double seal on outer sheath or single on outer & inner
- Direct & remote installation
- Superior levels of cable retention
- Displacement type flameproof seals
- Deluge protected
- Internationally marked IECEx & ATEX



TECHNICAL CLASSIFICATION	
DESIGN SPECIFICATION	BS 6121-Part 1:1989, IEC 62444, EN 62444
MECHANICAL CLASSIFICATION*	Impact = Level 8, Cable Anchorage = Class B
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass & Stainless Steel only
INGRESS PROTECTION RATING**	IP66, IP67 & IP68***
DELUGE PROTECTION COMPLIANCE	DTS01:91
CABLE TYPE	Unarmoured & Braided
SEAL MATERIAL	CMP SOLO LSF Halogen Free Thermoset Elastomer
SEALING TECHNIQUE	CMP Unique Displacement Seal Concept
SEALING AREA(S)	Cable Inner Bedding & Outer Cable Sheath, Double Seal on Cable Outer Sheath
CABLE GLAND MATERIAL	Brass, Electroless Nickel Plated Brass, Stainless Steel, Aluminium
CONTINUOUS OPERATING TEMPERATURE	-20°C to +200°C

* Mechanical & Electrical Classifications applied as per IEC 62444 & EN 62444 ** When CMP installation accessories are used. Refer to www.cmp-products.com for further information. *** IP68 tested to a minimum depth of 30 metres for 12 hours, alternate depths / durations can be provided upon request.

GLOBAL PRODUCT CERTIFICATION			
ATEX CERTIFICATE	CML18ATEX1322X, CML18ATEX4314X	IECEx CERTIFICATE	IECEx CML 18.0178X, IECEx SIM 14.0006
CODE OF PROTECTION	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da, II 3G Ex nR IIC Gc, I M2 Ex db I Mb, Ex eb I Mb	CODE OF PROTECTION	Ex db IIC Gb, Ex eb IIC Gb, Ex nR IIC Gc, Ex ta IIIC Da, Ex db I Mb, Ex eb I Mb
COMPLIANCE STANDARDS	EN 60079-0, 1, 7, 15, 31	COMPLIANCE STANDARDS	IEC 60079-0, 1, 7, 15, 31
NEPSI CERTIFICATE	GYJ18.1250X		

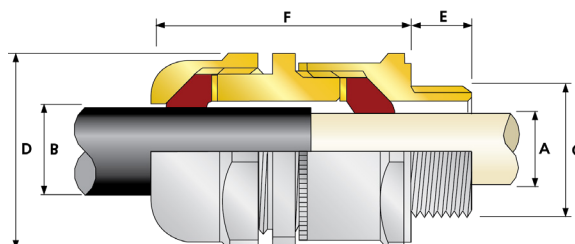

COMBINED ORDERING REFERENCE (*BRASS METRIC)			AVAILABLE ENTRY THREADS "C" (ALTERNATE METRIC THREAD LENGTHS AVAILABLE)					CABLE BEDDING DIAMETER "A"		OVERALL CABLE DIAMETER "B"		ACROSS FLATS "D"	ACROSS CORNERS "D"	PROTRUSION LENGTH "F"	SHROUD	CABLE GLAND WEIGHT (kgs)
			STANDARD			OPTION										
SIZE	TYPE	ORDERING SUFFIX	METRIC	THREAD LENGTH (METRIC) "E"	NPT	THREAD LENGTH (NPT) "E"	NPT	MIN	MAX	MIN	MAX	MAX	MAX			
20S16	SS2KHT	1RA	M20	15.0	1/2"	19.9	3/4"	3.2	8.6	3.2	8.6	24.0	26.4	49.0	PVC04	0.140
20S	SS2KHT	1RA	M20	15.0	1/2"	19.9	3/4"	6.1	11.7	6.1	11.7	24.0	26.4	49.0	PVC04	0.130
20	SS2KHT	1RA	M20	15.0	1/2"	19.9	3/4"	6.5	14.0	6.5	14.0	27.0	29.7	54.0	PVC05	0.160
25	SS2KHT	1RA	M25	15.0	3/4"	20.2	1"	11.1	20.0	11.1	20.0	36.0	39.6	66.0	PVC09	0.300
32	SS2KHT	1RA	M32	15.0	1"	25.0	1 1/4"	17.0	26.3	17.0	26.3	41.0	45.1	67.0	PVC10	0.350
40	SS2KHT	1RA	M40	15.0	1 1/4"	25.6	1 1/2"	23.5	32.1	23.5	32.1	50.0	55.0	70.0	PVC13	0.500
50S	SS2KHT	1RA	M50	15.0	1 1/2"	26.1	2"	31.0	38.2	31.0	38.2	55.0	60.5	65.0	PVC15	0.560
50	SS2KHT	1RA	M50	15.0	2"	26.9	2 1/2"	35.6	44.0	35.6	44.0	60.0	66.0	70.0	PVC18	0.590
63S	SS2KHT	1RA	M63	15.0	2"	26.9	2 1/2"	41.5	49.9	41.5	49.9	70.5	77.6	70.0	PVC21	0.890
63	SS2KHT	1RA	M63	15.0	2 1/2"	39.9	3"	47.2	55.9	47.2	55.9	75.0	82.5	71.0	PVC23	0.850
75S	SS2KHT	1RA	M75	15.0	2 1/2"	39.9	3"	54.0	61.9	54.0	61.9	80.0	88.0	70.0	PVC25	1.020
75	SS2KHT	1RA	M75	15.0	3"	41.5	3 1/2"	61.1	67.9	61.1	67.9	84.0	92.4	75.0	PVC26	0.990
90	SS2KHT	1RA	M90	24.0	3 1/2"	42.8	4"	66.6	79.4	66.6	79.4	108.0	118.8	113.0	PVC31	2.990
100	SS2KHT	1RA	M100	24.0	3 1/2"	42.8	4"	76.0	90.9	76.0	90.9	123.0	134.2	106.0	LSF33	3.390
115	SS2KHT	1RA	M115	24.0	4"	44.0	5"	86.0	97.9	86.0	97.9	133.4	146.7	128.0	LSF34	5.320
130	SS2KHT	1RA	M130	24.0	5"	46.8	-	97.0	114.9	97.0	114.9	152.4	167.6	129.0	LSF35	6.350

* For material options add the following suffix to the Ordering Reference; Brass (no suffix required); Nickel Plated Brass "5"; 316 Grade Stainless Steel "4"; Copper Free Aluminium "1"
For NPT options add the following digits to the material suffix; 1/8" = 31; 3/4" = 32; 1" = 33; 1 1/4" = 34; 1 1/2" = 35; 2" = 36; 2 1/2" = 37; 3" = 38; 3 1/2" = 39; 4" = 310 (Brass requires prefix '0')

Examples: 32SS2KHT1RA534 = Nickel Plated Brass 1 1/4" NPT, 50SS2KHT1RA035 = Brass 1 1/2" NPT, 25SS2KHT1RA432 = Stainless Steel 3/4" NPT, 20SS2KHT1RA5 = Nickel Plated Brass M20

Dimensions are displayed in millimetres unless otherwise stated