





## SCHEDULE

### TYPE EXAMINATION CERTIFICATE NUMBER ITS17ATEX 402817X

#### 13. Description of Equipment or Protective System

The Type PX\*\* series range of barrier cable glands consist of a male-threaded front entry component, fitted with a barrier tube such that a spigot/combination joint is formed, which is intended to screw into an entry point of its associated enclosure in accordance with relevant codes of practice. The barrier tube is filled with a sealing material that creates a flameproof seal around the cable cores passing through it and is mechanically retained. The front entry component to main body mating thread may be fitted with an optional 'O' ring seal to provide increased ingress protection. Clamping of the armour or braid is effected by a combination of the front entry component and the different optional armour cone and reversible sleeve combinations within the main body being fastened together. An outer seal nut threads onto the main body and creates an environmental seal between the gland and cable outer sheath. The outer seal nut contains an elastomeric sealing ring and a Nylon 6 ferrule.

#### Materials of manufacture

- Brass to BS EN 12164:2011 / BS EN 12168:2011 Grade CuZn39Pb3 (CW614N)
- Mild Steel to BS EN 10277-2:2008 Grades 220M07, 230M07 (EN1A) / 220M07Pb, 230M07Pb (EN1APb)
- Stainless Steel to BS EN 10088-3:2014 GRADES 316S11, 316S13, 316S31, 316S33, 316L
- Aluminium to BS EN 573-3:2013 / BS EN 755-1-3:2008 Grade 6082 T6, 6262 T6  
BS EN 1706:2010/ BS EN 1676:2010 Grade LM25 TF

#### **Design options**


- The front entry component may be manufactured with a profiled groove to captivate an 'O' ring seal which locates on the mating face with the associated enclosure. This option having the gland type designation prefixed with the letter R, e.g. 25RPX2KW.
- Alternative entry component thread forms:
  - Metric ISO 965-1, ISO965-3 medium fit (6g) for external threads
  - ET(Conduit) BS 31:1940 (1979), Table A
  - PG DIN 40430:1971
  - BSPP BS 2779:1986 class A full form for external threads
  - BSPT BS 21:1985 standard threads only as clause 5.4, gauging to clause 5.2 system A
  - ISO ISO 7/1:1994, gauging to ISO 7/2 clause 6.3 for external threads
  - NPT ANSI/ASME B1.20.1-1983 gauging to clause 8.1 for external threads
  - NPSM ANSI/ASME B1.20.1-1983 gauging to clause 9 for external threads
- Alternative material of manufacture of the ferrule to be the same as the gland material.
- The removal of the outer seal, nut and ferrule, along with the body component manufactured without the external mating thread. The cable gland being suitable for S.W.A armoured cables and is identified within type designation coding.
- The use of the barrier tube and spacer along with the manufacture of the front entry component with a female mating thread, to couple to an alternative main body, skid washer, seal and nut. The latter replacing other component parts. This variant being identified within type designation coding.
- PXSS2K range can be fitted with the outer seal nut from the PX\*\* range as an alternative.
- PX type glands may be fitted with armour cones with alternative diameters to allow the clamping of smaller or larger armour wires.
- Alternative outer seal arrangement to allow the glands to be attached to flexible conduit.
- PX2K\*\* range can be fitted with the outer seal nut assembly from the PKSS2K range as an alternative.





## SCHEDULE

### EU-TYPE EXAMINATION CERTIFICATE NUMBER ITS17ATEX 402817X

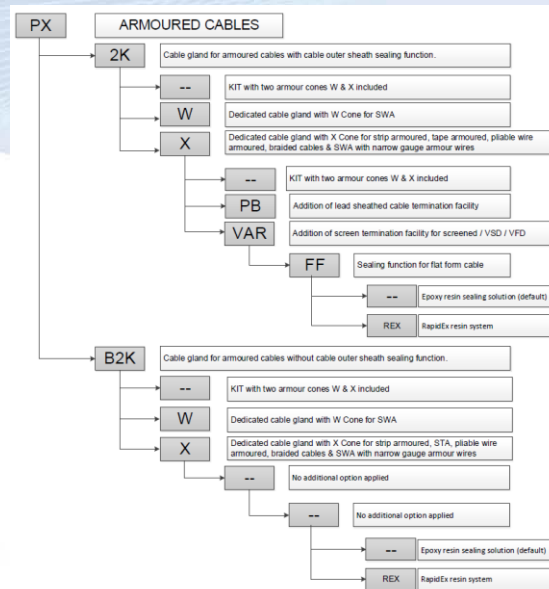

Gland size	Entry thread	Max. no. of cores (RAPIDEX)	Max. no. of cores (EP2122)	Max. Ø over cores (mm)	SWA (mm)		SWA, STA, strip armour, pliable wire armour <sup>1</sup> & wire braid (mm)		PXSS2K <sup>2,3</sup> outer seal sheath range Ø (mm)		PX <sup>**3</sup> outer seal sheath range Ø (mm)	
					Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
20s/16	M20 x 1.5	21	21	12.6	0.8	1.25	0	0.8	3.1	8.7	6.1	13.2
20s	M20 x 1.5	21	21	12.6	0.8	1.25	0	0.8	6.1	11.7	9.5	15.9
20	M20 x 1.5	21	21	12.6	0.8	1.25	0	0.8	6.5	14.0	12.5	20.9
20L	M20 x 1.5	21	21	12.6	0.8	1.25	0	0.8	10.0	15.9	N/A	N/A
25s	M25 x 1.5	30	30	17.5	1.25	1.6	0	1.1	11.1	20.0	14.0	22.0
25	M25 x 1.5	30	30	17.5	1.25	1.6	0	1.1	11.1	20.0	18.2	26.2
32	M32 x 1.5	50	38	23.6	1.6	2.0	0	1.2	17.0	26.3	23.7	33.9
32L	M32 x 1.5	50	38	23.6	1.6	2.0	0	1.2	20.0	27.4	N/A	N/A
40	M40 x 1.5	59	59	30.0	1.6	2.0	0	1.2	22.0	32.1	27.9	40.4
50s	M50 x 1.5	89	89	36.6	2.0	2.5	0	1.2	29.5	38.2	35.2	46.7
50	M50 x 1.5	89	89	41.0	2.0	2.5	0	1.5	35.6	44.1	40.4	53.1
63s	M63 x 1.5	115	115	47.9	2.0	2.5	0	1.5	40.1	50.1	45.6	59.4
63	M63 x 1.5	115	115	53.7	2.0	2.5	0	1.5	47.2	56.0	54.6	65.9



