



CLP2-W

MV Heavy Duty Copper Compression Cable Lug - Parallel Entry Long Barrel with 2 Stud Holes - Inspection Window

These products have been designed and third party certified to UL 486A-486B and CSA C22.2 No. 65, for high quality and reliable crimping.

Long barrel compression cable lugs enable additional crimps, offering increased electrical and mechanical properties.

Manufactured from high purity, oxygen-free, seamless copper tube (C110/CW009A), these cable lugs are precisely dimensioned to achieve optimal crimping with suitable conductors.

The lugs are annealed to enhance durability, minimising risk of fracture between the palm and barrel. The tin coating ensures corrosion and oxidation resistance, ensuring maximum efficiency of the connection.

There is a large inspection window to visually inspect conductor insertion; the inspection window can be removed as an option - see data sheet CLP2.

The centres of the two stud holes are detailed in the dimensional table. Custom stud hole dimensions are available on request.


TECHNICAL DATA & CLASSIFICATION	
ETIM Classification Code	EC001051
Barrel Type	Long
Entry Type	Parallel
Lug Material	Tin Plated Copper
Number of Stud Holes	2
Palm Angle	Straight
Temperature Rating	Up to 90 Degrees Celsius



FEATURES

- Available in sizes 8 AWG to 1,000 kcmil
- Third Party Certified to UL 486A-486B and CSA C22.2 No. 65
- Manufactured from high purity (99.9%) copper seamless tube (BS EN 13600)
- Annealed and electrolytically tin plated for reliable crimping, with oxidation and corrosion resistance
- Colour coded with enhanced marking on the barrel for simple die selection, inspection and traceability
- CMP crimping die available for optimal crimping
- Bevelled entry to aid conductor insertion
- Sold in bags; product must be ordered in bag multiples. See table on following page for bag quantities
- Crimping die index numbers match wire size; refer to CMP compatible die chart for more information



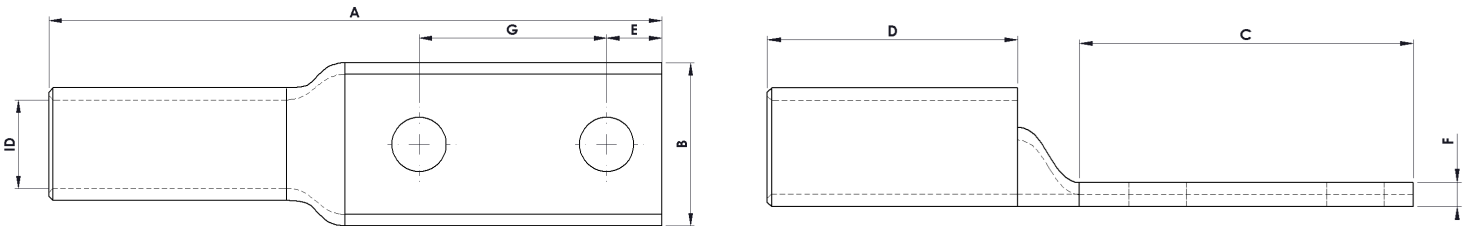

LUG IDENTIFICATION					DIMENSIONS (in)								PACK QTY
Part Number	Cable Size (AWG/MCM/kcmil)	Flex Cable Size (AWG/MCM/kcmil)	Hole Stud Size	Die Index No.	Internal Diameter (ID)	Overall Length (A)	Palm Width (B)	Palm Length (C)	Barrel Length (D)	Stud Hole Distance (E)	Palm Thickness (F)	Stud Hole Spacing (G)	
8CLP21058W	8	8	#10	08	0.17	2.19	0.42	1.26	0.81	0.28	0.08	0.63	100
8CLP21434W	8	8	1/4	08	0.17	2.3	0.42	1.38	0.81	0.32	0.08	0.75	100
8CLP21458W	8	8	1/4	08	0.17	2.19	0.42	1.26	0.81	0.28	0.08	0.63	100
8CLP21411W	8	8	1/4	08	0.17	2.74	0.42	1.81	0.81	0.38	0.08	1.00	100
8CLP2516134W	8	8	5/16	08	0.17	3.92	0.55	2.99	0.81	0.62	0.06	1.75	100
8CLP23811W	8	8	3/8	08	0.17	2.74	0.55	1.81	0.81	0.38	0.06	1.00	100
8CLP238134W	8	8	3/8	08	0.17	3.92	0.55	2.99	0.81	0.62	0.06	1.75	100
6CLP21412W	6	6	1/4	06	0.2	2.24	0.42	1.14	0.98	0.28	0.08	0.50	100
6CLP21434W	6	6	1/4	06	0.2	2.48	0.42	1.38	0.98	0.28	0.08	0.75	100
6CLP21458W	6	6	1/4	06	0.2	2.36	0.42	1.26	0.98	0.28	0.08	0.63	100
6CLP23834W	6	6	3/8	06	0.2	2.72	0.55	1.61	0.98	0.32	0.06	0.75	100
6CLP23811W	6	6	3/8	06	0.2	2.91	0.55	1.81	0.98	0.38	0.06	1.00	100
6CLP212134W	6	6	1/2	06	0.2	4.09	0.83	2.99	0.98	0.62	0.08	1.75	100
4CLP21434W	4	-	1/4	04	0.25	2.48	0.49	1.38	0.98	0.28	0.09	0.75	50
4CLP21458W	4	-	1/4	04	0.25	2.36	0.49	1.26	0.98	0.28	0.09	0.63	50
4CLP21411W	4	-	1/4	04	0.25	2.91	0.49	1.81	0.98	0.38	0.09	1.00	50
4CLP251611W	4	-	5/16	04	0.25	2.91	0.55	1.81	0.98	0.38	0.07	1.00	50
4CLP23834W	4	-	3/8	04	0.25	2.91	0.55	1.61	0.98	0.32	0.07	0.75	50
4CLP23811W	4	-	3/8	04	0.25	2.91	0.55	1.81	0.98	0.38	0.07	1.00	50
4CLP212134W	4	-	1/2	04	0.25	4.09	0.87	2.99	0.98	0.62	0.12	1.75	50
3CLP21434W	3	4	1/4	03	0.28	2.64	0.5	1.38	1.1	0.28	0.09	0.75	50
3CLP21458W	3	4	1/4	03	0.28	2.52	0.5	1.26	1.1	0.28	0.09	0.63	50

LUG IDENTIFICATION					DIMENSIONS (in)								PACK QTY
Part Number	Cable Size (AWG/MCM/kcmil)	Flex Cable Size (AWG/MCM/kcmil)	Hole Stud Size	Die Index No.	Internal Diameter (ID)	Overall Length (A)	Palm Width (B)	Palm Length (C)	Barrel Length (D)	Stud Hole Distance (E)	Palm Thickness (F)	Stud Hole Spacing (G)	
2CLP2141W	2	4	1/4	02	0.31	3.07	0.6	1.81	1.1	0.38	0.1	1.00	50
3CLP251634W	3	4	5/16	03	0.28	2.87	0.55	1.61	1.1	0.32	0.09	0.75	50
3CLP2381W	3	4	3/8	03	0.28	3.07	0.59	1.81	1.1	0.38	0.08	1.00	50
2CLP21434W	2	4	1/4	02	0.31	2.64	0.6	1.38	1.1	0.28	0.1	0.75	50
2CLP21458W	2	4	1/4	02	0.31	2.52	0.6	1.26	1.1	0.28	0.1	0.63	50
2CLP251634W	2	4	5/16	02	0.31	2.87	0.6	1.61	1.1	0.32	0.1	0.75	50
2CLP251678W	2	4	5/16	02	0.31	2.87	0.6	1.61	1.1	0.32	0.1	0.87	50
2CLP23834W	2	4	3/8	02	0.31	2.87	0.6	1.61	1.1	0.32	0.1	0.75	50
2CLP2381W	2	4	3/8	02	0.31	3.07	0.6	1.81	1.1	0.38	0.1	1.00	50
2CLP212134W	2	4	1/2	02	0.31	4.25	0.81	2.99	1.1	0.62	0.08	1.75	50
1CLP21434W	1	2	1/4	01	0.36	2.68	0.67	1.38	1.1	0.28	0.11	0.75	25
1CLP21458W	1	2	1/4	01	0.36	2.56	0.67	1.26	1.1	0.28	0.11	0.63	25
1CLP251678W	1	2	5/16	01	0.36	2.91	0.67	1.61	1.1	0.32	0.11	0.87	25
1CLP23878W	1	2	3/8	01	0.36	2.91	0.67	1.61	1.1	0.32	0.11	0.87	25
1CLP2381W	1	2	3/8	01	0.36	3.11	0.67	1.81	1.1	0.38	0.11	1.00	25
1CLP212134W	1	2	1/2	01	0.36	4.29	0.75	2.99	1.1	0.62	0.1	1.75	25
10CLP21458W	1/0	1	1/4	10	0.39	2.66	0.74	1.26	1.2	0.28	0.13	0.63	25
10CLP251678W	1/0	1	5/16	10	0.39	3.01	0.74	1.61	1.2	0.32	0.13	0.87	25
10CLP23834W	1/0	1	3/8	10	0.39	3.01	0.74	1.61	1.2	0.32	0.13	0.75	25
10CLP23878W	1/0	1	3/8	10	0.39	3.21	0.74	1.81	1.2	0.38	0.13	0.87	25
10CLP2381W	1/0	1	3/8	10	0.39	3.21	0.74	1.81	1.2	0.38	0.13	1.00	25
10CLP238134W	1/0	1	3/8	10	0.39	4.39	0.74	2.99	1.2	0.62	0.13	1.75	25
10CLP212134W	1/0	1	1/2	10	0.39	4.39	0.74	2.99	1.2	0.62	0.13	1.75	25
20CLP21434W	2/0	1/0	1/4	20	0.44	2.99	0.81	1.38	1.38	0.28	0.12	0.75	25
20CLP21458W	2/0	1/0	1/4	20	0.44	2.87	0.81	1.26	1.38	0.28	0.12	0.63	25
20CLP2141W	2/0	1/0	1/4	20	0.44	3.43	0.81	1.81	1.38	0.38	0.12	1.00	25
20CLP2381W	2/0	1/0	3/8	20	0.44	3.43	0.81	1.81	1.38	0.38	0.12	1.00	25
20CLP238134W	2/0	1/0	3/8	20	0.44	4.61	0.81	2.99	1.38	0.62	0.12	1.75	25
20CLP212134W	2/0	1/0	1/4	20	0.44	4.61	0.81	2.99	1.38	0.62	0.12	1.75	25
30CLP21434W	3/0	2/0	1/4	30	0.49	3.07	0.9	1.38	1.38	0.28	0.13	0.75	15



LUG IDENTIFICATION					DIMENSIONS (in)								PACK QTY
Part Number	Cable Size (AWG/MCM/kcmil)	Flex Cable Size (AWG/MCM/kcmil)	Hole Stud Size	Die Index No.	Internal Diameter (ID)	Overall Length (A)	Palm Width (B)	Palm Length (C)	Barrel Length (D)	Stud Hole Distance (E)	Palm Thickness (F)	Stud Hole Spacing (G)	
30CLP21458W	3/0	2/0	1/4	30	0.49	2.95	0.9	1.26	1.38	0.28	0.13	0.63	15
30CLP25161W	3/0	2/0	5/16	30	0.49	3.5	0.9	1.81	1.38	0.32	0.13	1.00	15
30CLP2381W	3/0	2/0	3/8	30	0.49	3.5	0.9	1.81	1.38	0.38	0.13	1.00	15
30CLP238134W	3/0	2/0	3/8	30	0.49	4.69	0.9	2.99	1.38	0.62	0.13	1.75	15
30CLP212134W	3/0	2/0	1/2	30	0.49	4.69	0.9	2.99	1.38	0.62	0.13	1.75	15
40CLP21434W	4/0	3/0	1/4	40	0.55	3.11	1	1.38	1.42	0.28	0.13	0.75	15
40CLP214134W	4/0	3/0	1/4	40	0.55	4.72	1	2.99	1.42	0.28	0.13	1.75	15
40CLP2381W	4/0	3/0	3/8	40	0.55	3.54	1	1.81	1.42	0.38	0.13	1.00	15
40CLP23858W	4/0	3/0	3/8	40	0.55	2.99	1	1.26	1.42	0.38	0.13	0.63	15
40CLP212134W	4/0	3/0	1/2	40	0.55	4.72	1	2.99	1.42	0.62	0.13	1.75	15
250CLP2381W	250	4/0	3/8	250	0.59	3.78	1.09	1.81	1.61	0.38	0.15	1.00	10
250CLP212134W	250	4/0	1/2	250	0.59	4.96	1.09	2.99	1.61	0.62	0.15	1.75	10
300CLP2381W	300	250 G,H	3/8	300	0.66	4.13	1.19	1.81	1.97	0.38	0.15	1.00	10
300CLP212134W	300	250 G,H	1/2	300	0.66	5.31	1.19	2.99	1.97	0.62	0.15	1.75	10
350CLP2381W	350	250 G,H,I,K,M 262 DLO	3/8	350	0.7	4.21	1.28	1.81	1.97	0.38	0.17	1.00	5
350CLP212134W	350	250 G,H,I,K,M 262 DLO	1/2	350	0.7	5.39	1.28	2.99	1.97	0.62	0.17	1.75	5
400CLP2381W	400	300 G,H,I,K,M 313 DLO	3/8	400	0.76	4.29	1.39	1.81	1.97	0.38	0.18	1.00	5
400CLP212134W	400	300 G,H,I,K,M 313 DLO	1/2	400	0.76	5.47	1.39	2.99	1.97	0.62	0.18	1.75	5
500CLP2381W	500	350 G,H,I,K,M 373 DLO	3/8	500	0.83	4.57	1.54	1.81	2.24	0.38	0.22	1.00	5
500CLP212134W	500	350 G,H,I,K,M 373 DLO	1/2	500	0.83	5.75	1.54	2.99	2.24	0.62	0.22	1.75	5
600CLP2381W	600	400 G,H,I,K,M 444 DLO	3/8	600	0.93	4.61	1.72	1.81	2.24	0.38	0.25	1.00	1
600CLP212134W	600	400 G,H,I,K,M 444 DLO	1/2	600	0.93	5.79	1.72	2.99	2.24	0.62	0.25	1.75	1
700CLP212134W	700	500 G,H,I,K,M 535 DLO	1/2	700	0.98	6.3	1.77	2.99	2.64	0.62	0.27	1.75	1
700CLP258134W	700	500 G,H,I,K,M 535 DLO	5/8	700	0.98	6.3	1.77	2.99	2.64	0.62	0.27	1.75	1
750CLP2381W	750	600 G,H,I 646 DLO	3/8	750	1.03	5.12	1.9	1.81	2.64	0.38	0.27	1.00	1
750CLP212134W	750	600 G,H,I 646 DLO	1/2	750	1.03	6.3	1.9	2.99	2.64	0.62	0.27	1.75	1
1000CLP212134W	1000	750 G,H,I 777 DLO	1/2	1000	1.19	6.81	2.18	2.99	3.15	0.62	0.33	1.75	1
1000CLP258134W	1000	750 G,H,I 777 DLO	5/8	1000	1.19	6.81	2.18	2.99	3.15	0.62	0.33	1.75	1

