FORTRA
C SERIES



Shown with optional face seal

CTUe

FOR ALL TYPES OF ARMOURED & BRAIDED / SCREENED CABLES

- Unique patented captive 'Adaptive Cone' for all types of armour or braid, with captive 'AnyWay' clamping ring
- Metal-to-metal armour clamping; no installation or inspection ambiguity
- Fewer installation steps for faster process. Unique 'Quick' Thread for faster armour clamping
- Outer seal with wider cable acceptance, meaning fewer stocking sizes
- IP66, 67, 68, 69 & 69K as standard with fully enclosed/protected deluge seal for third party compliance to DTS 01:91 & NEMA 4X & 6P
- Compact design; ideal for applications with limited installation space
- Fewer tools required for installation and maintenance

PATENT PROTECTED
SEE CMP-PRODUCTS.COM/PATENTS


Ex eb | Ex ta

IP66 | IP67 | IP68 | IP 69K

NEMA 4X | NEMA 6P | DELUGE PROTECTED | +130 °C / -60 °C

TECHNICAL DATA		
DESIGN SPECIFICATION		BS 6121-1, IEC 62444, EN 62444
MECHANICAL CLASSIFICATION*		16-20S Impact = Category 6, 20-130 Impact = Category 8 Wire Armour Anchorage = Type D, Braid Anchorage = Type C
ENCLOSURE PROTECTION		16-20S IK08 to IEC 62262 (7 Joules) 20-130 IK10 to IEC 62262 (20 Joules)
ELECTRICAL CLASSIFICATION		Category B (Category A when used with braid, tape or pliable wire armour cables)
INGRESS PROTECTION RATING**		IP66, IP67, IP68***, IP69 and IP69K
TYPE RATING**		NEMA 4X & 6P
DELUGE PROTECTION COMPLIANCE		DTS 01:91
SERVICE TEMPERATURE		-60 to +130 °C
ARMOUR CLAMPING		Captive 'Adaptive' Armour Cone and Captive 'AnyWay' Clamping Ring
SEAL MATERIAL		LSF Halogen Free Silicone
SEALING TECHNIQUE		Outer Environmental/Load Retention Seal
SEALING AREA(S)		Cable Outer Sheath
TYPE MATERIAL OPTIONS		Brass†, Electroless Nickel Plated Brass, Stainless Steel
CABLE TYPE (S)	W	Single Wire Armour (SWA), Aluminium Wire Armour (AWA)
	X	Pliable Wire Armour (PWA), Steel Tape Armour (STA), Wire Braid Armour (e.g. SWB), Aluminium Strip Armour (ASA), Screened Flexible (EMC) Wire Braid (e.g. CY / SY), Armoured & Jacketed

CERTIFICATIONS			
ATEX CERTIFICATE NUMBER	CML 24ATEX1333X	IECEx CERTIFICATE NUMBER	IECEx CML 24.0137X
UKEX CERTIFICATE NUMBER	CML 24UKEX1335X		
ATEX & UKEX CODE OF PROTECTION	Ex I M2, Ex eb I Mb; Ex II 2G 3G 1D, Ex eb IIC Gb, Ex ta IIIC Da	IECEx CODE OF PROTECTION	Ex eb I Mb, Ex eb IIC Gb, Ex ta IIIC Da
ATEX & UKEX COMPLIANCE STANDARDS	EN 60079-0, -7, -31	IECEx COMPLIANCE STANDARDS	IEC 60079-0, -7, -31
EAC CERTIFICATE NUMBER	EAЭC KZ 7100841.01.01.07859		
EAC CODE OF PROTECTION	Ex 1Ex eb IIC Gb X, Ex Ex ta IIIC Da X		
cCSAus CERTIFICATE	Contact CMP for full details		
UkrSEPRO CERTIFICATE NUMBER	СЦ 25.1094X		
MARINE APPROVALS	LR:LR22320739TA, ABS: 25-0285992-PDA, DNV: TAE000000Y BV: 43180		
INMETRO CERTIFICATE NUMBER	TÜV 25.0801X		
INDUSTRIAL CERTIFICATE NUMBER	CML 24CA17921		
TAIWAN CERTIFICATE NUMBER	ML141200751312		
PESO CERTIFICATE NUMBER	P640726/1, P640727/1, P640727/5		
CCC CERTIFICATE NUMBER	2026322313007163		

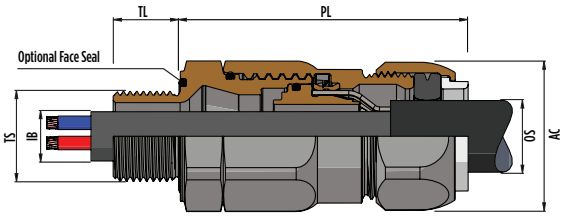

* Mechanical and Electrical Classifications applied as per IEC 62444 and EN 62444
** When CMP installation accessories are used. Refer to www.cmp-products.com for further information
*** IP68 tested to a depth of 30 metres for 7 days, alternative depths / durations can be provided on request
† Not available with NEMA type 4X and 6P

COMBINED ORDERING REFERENCE			ENTRY THREAD SIZE 'TS'	ENTRY THREAD PITCH	MINIMUM THREAD LENGTH 'TL'	OVERALL CABLE DIAMETER 'OS'		ARMOUR THICKNESS				MAX ACROSS FLATS	MAX ACROSS CORNERS 'AC'	MAX PROTRUSION LENGTH 'PL'	SHROUD SIZE	ASSEMBLY WEIGHT (KG)
								CABLE TYPE (W)		CABLE TYPE (X)						
SIZE	TYPE	ORDERING SUFFIX				MIN	MAX	MIN	MAX	MIN	MAX					
20S16‡	CTUE	502	M20	1.5	15.0	6.1	13.2	0.8	1.25	0.3	1.0	24.0	26.4	52.0	04	0.09
20S‡	CTUE	502	M20	1.5	15.0	9.5	15.9	0.8	1.25	0.3	1.0	24.0	26.4	52.0	04	0.08
20	CTUE	502	M20	1.5	15.0	12.5	20.9	0.8	1.25	0.4	1.2	30.5	33.6	50.0	06	0.12
25	CTUE	503	M25	1.5	15.0	16.0	26.2	1.25	1.6	0.4	1.2	37.5	41.3	62.5	09	0.23
32	CTUE	504	M32	1.5	15.0	21.5	33.9	1.6	2.0	0.4	1.2	46.0	50.6	66.5	11	0.34
40	CTUE	505	M40	1.5	15.0	28.0	40.4	1.6	2.0	0.4	1.6	55.0	60.5	71.5	15	0.51
50	CTUE	506	M50	1.5	15.0	38.0	53.2	2.0	2.5	0.6	1.6	70.0	77.0	74.5	21	0.78
63	CTUE	507	M63	1.5	15.0	52.0	66.0	2.0	2.5	0.6	1.6	80.0	88.0	85.5	25	0.98
75	CTUE	508	M75	1.5	15.0	64.5	78.5	2.5	3.0	0.6	1.6	100.0	110.0	90.0	30	1.84
90	CTUE	509	M90	2	24.0	75.0	90.5	3.15	4.0	0.8	1.6	114.0	125.4	133.3	32	3.73
100	CTUE	5010	M100	2	24.0	86.0	101.5	3.15	4.0	0.8	1.6	123.0	135.3	125.9	33	3.37
115	CTUE	5011	M115	2	24.0	101.0	110.5	3.15	4.0	0.8	1.6	133.0	146.3	140.5	34	4.74
130	CTUE	5012	M130	2	24.0	110.0	123.5	3.15	4.0	0.8	1.6	153.0	168.3	140.5	35	6.22

Dimensions listed are for cable glands with metric equipment entry threads only. Alternative entry thread types e.g. NPT are available; dimensions may vary.

Part numbers listed are for nickel plated brass cable glands only. Alternative materials are available. ‡ Also available in M16 on request

For material options, please change the 'material suffix', which is the first digit in the 'ordering suffix'. Brass = 0, Stainless Steel = 4 and Nickel Plated Brass = 5.
Examples: 20CTUE002 = Brass M20, 40CTUE405 = Stainless Steel M40

For NPT thread options, please change the second digit in the 'ordering suffix' to 3 (denotes NPT) and change the final digit to denote the thread size i.e. ½" = 31, ¾" = 32, 1" = 33, 1-1/4" = 34, 1-1/2" = 35, 2" = 36, 2-1/2" = 37, 3" = 38, 3-1-2" = 39, 4" = 310, 5" = 312. Examples: 32CTUE533 = Nickel Plated Brass 1" NPT, 50CTUE 436 = Stainless Steel 2" NPT

Sizes 90-130 are provided with a reversible armour cone. The 'X' side clamps 0.8 - 1.6 mm and the 'W' side clamps 3.15 - 4.0 mm