


717

717 NYLON UNIVERSAL STOPPER PLUG, CONDUIT ACCESSORY

- Provides means of blanking unused cable entries
- Cost effective moulded design
- Universal tightening design (hex head, allen key and slotted/flat screw head)
- Temporary or permanent
- Available in a variety of colours
- Approved entry thread sealing washer available
- -60 to +105°C
- UL94 V-0 approved material available

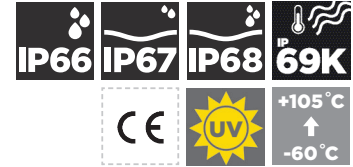

COLOUR	SUFFIX	METRIC ORDERING EXAMPLE	NPT ORDERING EXAMPLE
BLACK - RAL9011	-	717GM2	717GT1
GREY - RAL7035	1	717GM21	717GT11
GREY - RAL7001	2	717GM22	717GT12
WHITE	3	717GM23	717GT13
BLUE - RAL5015	4	717GM24	717GT14
RED - RAL3000	5	717GM25	717GT15

TECHNICAL CLASSIFICATION		
INGRESS PROTECTION RATING		*MINIMUM IP68 DEPTH AND DURATION
WITHOUT ENTRY THREAD SEAL FITTED	IP66,IP67,IP68**,IP69,IP69K	1.1 metres for 16 hours**
WITH ENTRY THREAD SEAL FITTED	IP66,IP67,IP68**,IP69,IP69K	30 metres for 16 hours**
AVAILABLE MATERIALS	Halogen-free Polyamide	
CONTINUOUS OPERATING TEMPERATURE	-60°C to +105°C	

**Alternative depths / durations can be provided upon request.

DESCRIPTION	ALLEN KEY RECESS	METALLIC			NON-METALLIC	
		Ex 'd'	Ex 'e'	INDUSTRIAL	Ex 'e'	INDUSTRIAL
747 RECESSED NON-TAMPER PROOF TYPE 'A'	✓	✓	✓	✓	✓	✓
747 RECESSED TAMPER-PROOF TYPE 'B'	✓	✓	✓	✓	✓	✓
757 HEXAGON HEAD	x	✓	✓	✓	✓	✓
757 HEXAGON HEAD C/W O-RING SEAL	x	✓	✓	✓	✓	✓
767 DOME HEAD	✓	✓	✓	✓	✓	✓
767 DOME HEAD C/W O-RING SEAL	✓	✓	✓	✓	✓	✓
717 UNIVERSAL	✓	x	x	x	✓	✓

PRODUCT SELECTION TABLE					
ORDERING REFERENCE	THREAD SIZE	MINIMUM THREAD LENGTH	ACROSS FLATS	ACROSS CORNERS DIAMETER	PROTRUSION LENGTH
717GM2	M20	10.0	24.0	26.3	7.0
717GM3	M25	10.0	28.0	30.7	7.0
717GM4	M32	10.0	38.0	41.7	8.0

All dimensions shown are in millimetres unless otherwise stated

Ordering reference shown for black metric product

PRODUCT SELECTION TABLE - NPT					
ORDERING REFERENCE	THREAD SIZE	MINIMUM THREAD LENGTH	ACROSS FLATS	ACROSS CORNERS DIAMETER	PROTRUSION LENGTH
717GM2	1/2"	14.0	24.0	26.3	7.0
717GM3	3/4"	14.0	28.0	30.7	7.0
717GM4	1"	14.0	38.0	41.7	8.0

All dimensions shown are in millimetres unless otherwise stated

Ordering reference shown for black NPT product

For additional sizes please refer to stopper plug range at www.cmp-products.com