



ACCESSORIES

C-clamp



For use with un-slotted rungs.

Separation Pad



Prevent galvanic corrosion between two dissimilar metals.

Contact CMP for more information regarding accessories and substrates.

PPE




CAUTION: We strongly recommend wearing suitable PPE including anti cut gloves.

Please refer to local PPE regulations.

HINGED CABLE CLEATS

MERCURY QHDSS

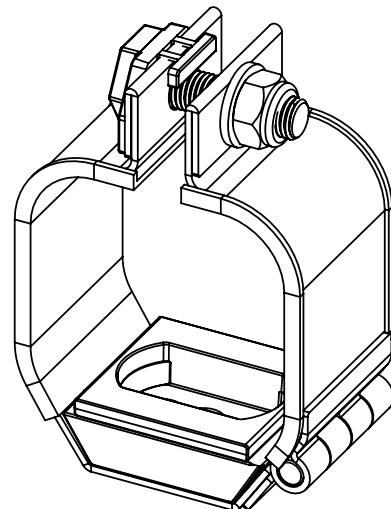

Cable Cleat Specification

Name	Type	Material	Certification	Size Range	Temp Range	Liner Type	Bolt(s)*
MERCURY	QHDSS	Stainless Steel	IEC 61914	16 - 71mm in 19 sizes Quad Formation	-60°C to +60°C or -60°C to +130°C**	Low Smoke & Fume (LSF) Zero Halogen (LSOH) & Phosphorus Free Polymer	1 x Central M12 or 2 x Outer M10

All products are short-circuit tested. Please visit www.cmp-products.com for further details.

Note: Fixings not included. For more information on fixings please visit www.cmp-products.com and download the Cleat Fixing Pack data sheet. Any other queries please contact CMP via email customerservices@cmp-products.com.

There are no restrictions on the mounting orientation of the cleats.

* The number of bolts used is based on individual site specification.

** Product part numbers with suffix 'HT' have a high temperature rating, see table.

www.cmp-products.com

Tel: +44 (0) 191 265 7411

Fax: +44 (0) 1670 715 646


E-mail: customerservices@cmp-products.com

© Copyright CMP Products Limited 2017. All rights reserved.


FI671 REV 0 08/23




**CLEAT FITTING
INSTRUCTIONS**

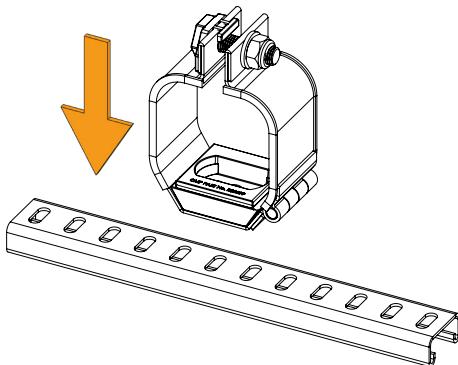


1. PLACE CLEAT ON MOUNTING SURFACE

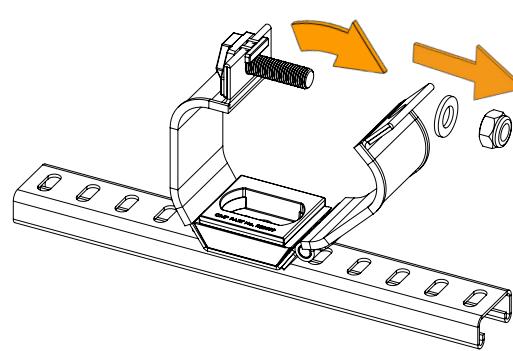


2. UNGHINGE CLEAT ARM

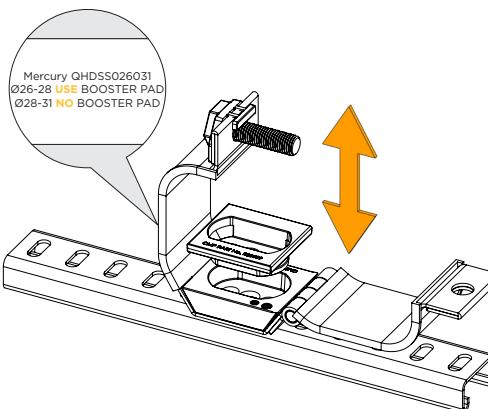


3. REMOVE BOOSTER PAD AS REQUIRED

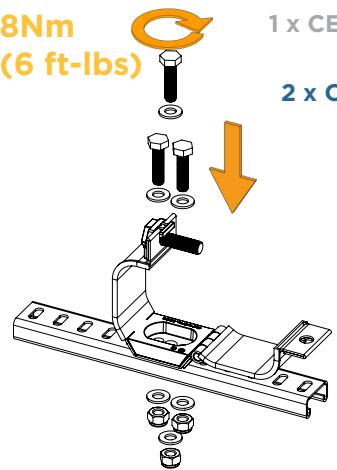


4. SECURE CLEAT TO MOUNTING SURFACE

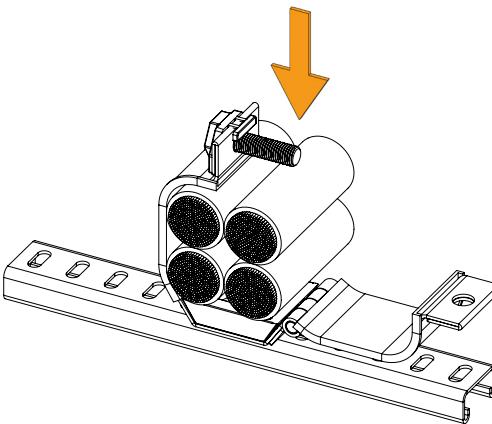


5. LAY CABLES IN CLEAT

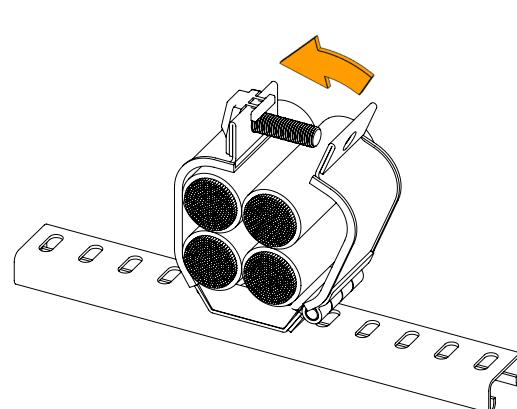

6. CLOSE CLEAT ARM

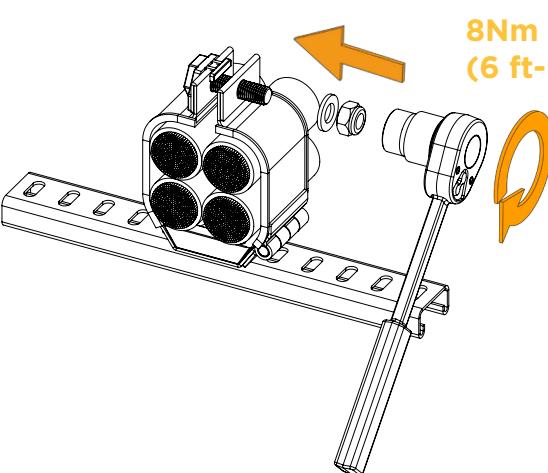

7. TIGHTEN MOUTH BOLT NUT

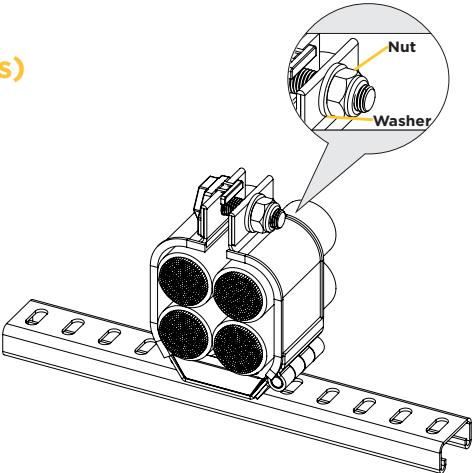

8. INSTALLED CLEAT

8Nm
(6 ft-lbs)

1 x CENTRAL M12
OR
2 x OUTER M10