



## TRITON CDS (T3CDSHT) INTERNATIONALLY APPROVED, EXPLOSIVE ATMOSPHERE CABLE GLAND

### FOR ALL TYPES OF ARMoured CABLES

- -20°C to 200°C high temperature ThermEx seals
- Fully sequential, three step installation procedure
- Reduces installation times, cost & risk
- Direct & remote installation
- Unique compensating displacement seal system (CDS)
- Metal-to-metal installation every time regardless of cable diameter
- Designed to reduce the effects of coldflow
- Integral protected deluge seal
- Controlled outer 'load retention' seal
- Unique OSTG prevents overtightening
- Internationally marked, IECEx & ATEX
- Superior EMC performance

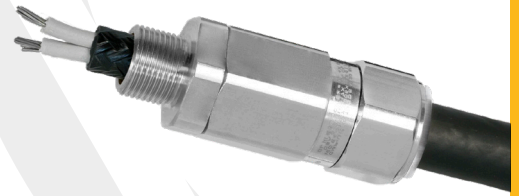


TECHNICAL CLASSIFICATION	
DESIGN SPECIFICATION	BS 6121:Part 1:1989, IEC 62444, EN 62444
MECHANICAL CLASSIFICATION*	Impact = Level 8, Cable Anchorage = Class D
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass & Stainless Steel only
ELECTRICAL CLASSIFICATIONS*	Category B (Category A when used with braid, tape or pliable wire armour cables)
INGRESS PROTECTION RATING**	IP66, IP67 & IP68***
DELUGE PROTECTION COMPLIANCE	DTS01 : 91
CABLE TYPE	Single Wire Armour (SWA), Aluminium Wire Armour (AWA), Pliable Wire Armour (PWA), Steel Tape Armour (STA), Aluminium Strip Armour (ASA), Screened Flexible (EMC) Wire Braid (e.g. CV/SY), Wire Braid Armour (e.g. SWB)
SEAL MATERIAL	CMP SOLO LSF Halogen Free Thermoset Elastomer
SEALING TECHNIQUE	Inner Bedding Sealing Ring: Compensating Displacement Seal (CDS), Outer Sheath Sealing Ring: Load Retention Seal (LRS)
SEALING AREA(S)	Cable Inner Bedding & Outer Cable Sheath
CABLE GLAND MATERIAL	Brass, Electroless Nickel Plated Brass, Aluminium, Stainless Steel
ARMOUR CLAMPING	Reversible Armour Cone & AnyWay Universal Clamping Ring
CONTINUOUS OPERATING TEMPERATURE	-20°C to +200°C

\* Mechanical & Electrical Classifications applied as per IEC 62444 & EN 62444 \*\* When CMP installation accessories are used. Refer to [www.cmp-products.com](http://www.cmp-products.com) for further information. \*\*\* IP68 tested to a minimum depth of 30 metres for 12 hours, alternate depths / durations can be provided upon request

PATENT GRANTED: GB 1077517

GLOBAL PRODUCT CERTIFICATION			
ATEX CERTIFICATE	CML18ATEX1326X, CML18ATEX4318X	IECEx CERTIFICATE	IECEx CML 18.0183X, IECEx SIM 14.0007X
CODE OF PROTECTION	Ⓜ II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da, Ⓜ II 3G Ex nR IIC Gc, Ⓜ I M2, Ex db I Mb, Ex eb I Mb	CODE OF PROTECTION	Ex db IIC Gb, Ex eb IIC Gb, Ex nR IIC Gc, Ex ta IIIC Da, Ex db I Mb, Ex eb I Mb
COMPLIANCE STANDARDS	EN60079-0,1,7,15,31	COMPLIANCE STANDARDS	IEC 60079-0,1,7,15,31
NEPSI CERTIFICATE	GY18.1253X		

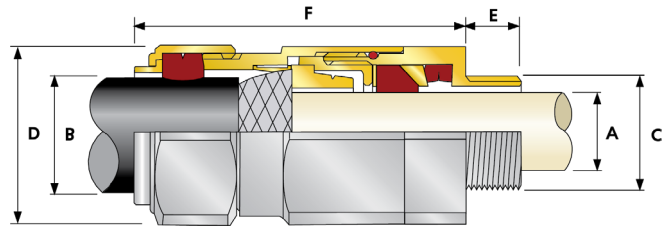

\* Grooved Cone (X) is predominantly used for Wire Braid (e.g. GS WB, TCWB), Steel Tape Armour (STA, DSTA) and Aluminium Strip Armour (ASA) but is also suitable for Single Wire Armour (SWA), Aluminium Wire Armour (AWA) and Pliable Wire Armour (PWA) if the range is outside that of the Stepped Cone (W). Grooved Cone (X) dimensions shown in the Cable Gland Selection Table below are for a double wire strand of braid or braided cables. Tapes can also be doubled over. For cables that have only a single layer of armour such as SWA the clamping range should be used as shown in the table below. Stepped (W) Cone is suitable for Single Wire Armour (SWA), or Aluminium Wire Armour (AWA) cables.

COMBINED ORDERING REFERENCE (BRASS METRIC)			AVAILABLE ENTRY THREADS "C" (ALTERNATE METRIC THREAD LENGTHS AVAILABLE)					CABLE BEDDING DIAMETER "A"		OVERALL CABLE DIAMETER "B"		ARMOUR RANGE†				ACROSS FLATS "D"		ACROSS CORNERS "D"		PROTRUSION LENGTH "F"	SHROUD	CABLE GLAND WEIGHT (KGS)
			STANDARD			OPTION						GROOVED CONE (X)		STEPPED CONE (W)		MAX	MAX	MAX	MAX			
			SIZE	TYPE	ORDERING SUFFIX	METRIC	THREAD LENGTH (METRIC) "E"					NPT	THREAD LENGTH (NPT) "E"	NPT	MIN							
20S16	T3CDSHT	1RA	M20	15.0	½"	19.9	¾"	3.1	8.6	6.1	13.1	0.3	1.0	0.8	1.25	24.0	26.4	78.7	PVC36	0.20		
20S	T3CDSHT	1RA	M20	15.0	½"	19.9	¾"	6.1	11.6	9.5	15.9	0.3	1.0	0.8	1.25	24.0	26.4	78.7	PVC36	0.20		
20	T3CDSHT	1RA	M20	15.0	½"	19.9	¾"	6.5	13.9	12.5	20.9	0.4	1.0	0.8	1.25	30.5	33.6	76.2	PVC06	0.28		
25S	T3CDSHT	1RA	M25	15.0	¾"	20.2	1"	11.1	19.9	14.0	22.0	0.4	1.2	1.25	1.6	37.5	41.3	88.8	PVC09	0.44		
25	T3CDSHT	1RA	M25	15.0	¾"	20.2	1"	11.1	19.9	18.2	26.2	0.4	1.2	1.25	1.6	37.5	41.3	88.7	PVC09	0.44		
32	T3CDSHT	1RA	M32	15.0	1"	25.0	1 ¼"	17.0	26.2	23.7	33.9	0.4	1.2	1.6	2.0	46.0	50.6	90.7	PVC11	0.63		
40	T3CDSHT	1RA	M40	15.0	1 ¼"	25.6	1 ½"	22.0	32.1	27.9	40.4	0.4	1.6	1.6	2.0	55.0	60.5	93.2	PVC15	0.91		
50S	T3CDSHT	1RA	M50	15.0	1 ½"	26.1	2"	29.5	38.1	35.2	46.7	0.4	1.6	2.0	2.5	60.0	66.0	100.7	PVC18	1.12		
50	T3CDSHT	1RA	M50	15.0	2"	26.9	2 ½"	35.6	44.0	40.4	53.0	0.6	1.6	2.0	2.5	70.1	77.1	105.8	PVC21	1.60		
63S	T3CDSHT	1RA	M63	15.0	2"	26.9	2 ½"	40.1	49.9	45.6	59.4	0.6	1.6	2.0	2.5	75.0	82.4	102.5	PVC23	1.73		
63	T3CDSHT	1RA	M63	15.0	2 ½"	39.9	3"	47.2	55.9	54.6	65.8	0.6	1.6	2.0	2.5	80.0	88.0	105.4	PVC25	1.78		
75S	T3CDSHT	1RA	M75	15.0	2 ½"	39.9	3"	52.8	61.9	59.0	72.0	0.6	1.6	2.0	2.5	90.0	99.0	110.6	PVC28	2.57		
75	T3CDSHT	1RA	M75	15.0	3"	41.5	3 ½"	59.1	67.9	66.7	78.4	0.6	1.6	2.5	3.0	100.0	110.0	120.3	PVC30	3.33		
90	T3CDSHT	1RA	M90	24.0	3 ½"	42.8	4"	66.6	78.6	76.2	90.3	0.8	1.6	3.15	4.0	115.0	126.5	138.9	PVC32	4.87		
100	T3CDSHT	1RA	M100	24.0	3 ½"	42.8	4"	76.0	90.9	86.1	101.4	0.8	1.6	3.15	4.0	127.0	139.7	128.2	LSF33	4.97		
115	T3CDSHT	1RA	M115	24.0	4"	44.0	5"	86.0	97.9	101.5	110.2	0.8	1.6	3.15	4.0	138.0	151.8	161.3	LSF34	7.72		
130	T3CDSHT	1RA	M130	24.0	5"	46.8	-	97.0	114.9	110.2	123.2	0.8	1.6	3.15	4.0	157.0	172.7	173.3	LSF35	9.78		

† For material options add the following suffix to the Ordering Reference; Brass (no suffix required); Nickel Plated Brass '5'; 316 Grade Stainless Steel '4'; Copper Free Aluminium '1' For NPT options add the following digits to the material suffix; ½" = 31; ¾" = 32; 1" = 33; 1 ¼" = 34; 1 ½" = 35; 2" = 36; 2 ½" = 37; 3" = 38; 3 ½" = 39; 4" = 310 (Brass requires prefix '0')

Examples: 32T3CDSHT1RA534 = Nickel Plated Brass 1 ¼" NPT, 50S3T3CDSHT1RA035 = Brass 1 ½" NPT, 25T3CDSHT1RA432 = Stainless Steel ¾" NPT, 20T3CDSHT1RA5 = Nickel Plated Brass M20

Dimensions are displayed in millimetres unless otherwise stated